

MOUNTING RECOMMENDATIONS FOR INTERIOR SHUTTERS

For **Plantation** Shutters trimmed to specified dimensions for inside casing or frame mounting, add **\$200.00** per pair.
Ready to paint and install; includes frame or hanging strips and hardware.

FRAME MOUNT INSTALLATION


In some applications it may be more efficient and simpler to mount your shutters to the window molding or directly to the wall. These procedures allow for greater flexibility for windows with a shallow depth or that may be constructed out of square.

It is important that various parts of the window construction (casing, molding, handles, etc.) allow enough space for louver extension in the fully open position when the shutter is closed and the louvers are fully open. Standard clearances are: 1-1/4" with 3-1/2" slats; 3/4" with 2-3/8" slats; and 1/2" with 1-7/8" slats.



Note: Remember to measure and remeasure to verify your numbers before selecting your shutters and the desired mounting procedure.

Frame Mount Installation

Frames may be mounted to molding or directly to the wall outside the molding.

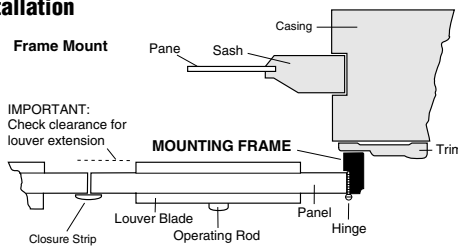

WINDOW MEASUREMENTS FRAME MOUNT

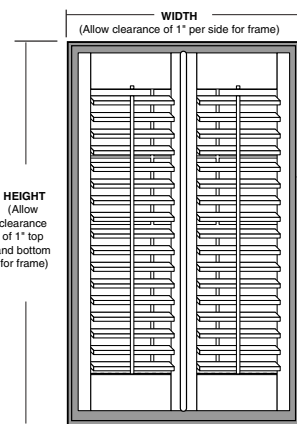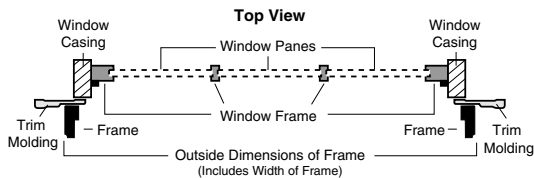

1. Locate the first flat area wide enough to mount the 1" frame.

Note: For frames mounted on window molding, molding must have a flat area of at least 1/2".

2. Measure window left to right and top to bottom. Allow 1" on all sides for frame width.

Note: Be sure to measure using the same flat area on all sides of the window molding.

*Openings over 72" wide require a T-Post or Track System.

TRACK WITH FRAME INSTALLATION

OPENINGS MEASURING:


0"-50" wide	Add \$ 200 list per opening
51"-100" wide	Add \$ 250 list per opening
101"- over wide	Add \$ 300 list per opening

This includes the cost for the building the special frame and valance that holds the track. Also included in this price is all the mounting hardware associated with this installation method.


Note: These prices are in addition to the cost of finishing Option 3 on page 31.

INSTALLATION INSIDE CASING


A. Hanging Strip & Wrap Around Hinge

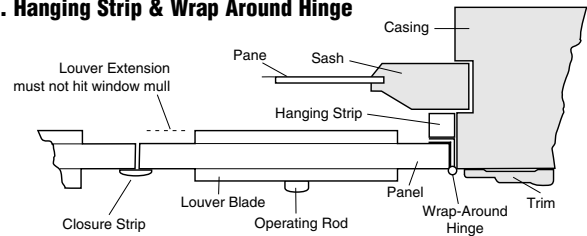


B. Hanging Strip & Butt Hinge

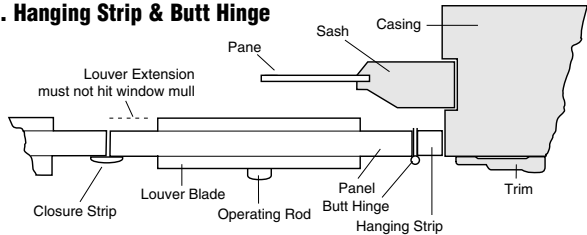

C. Frame Mount Inside Casing

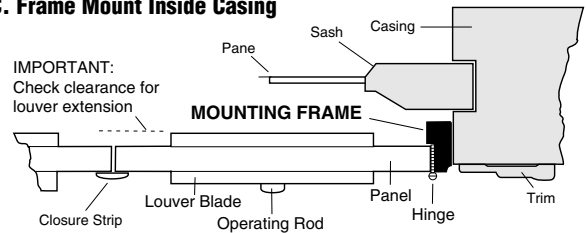

WINDOW MEASUREMENTS INSIDE CASING

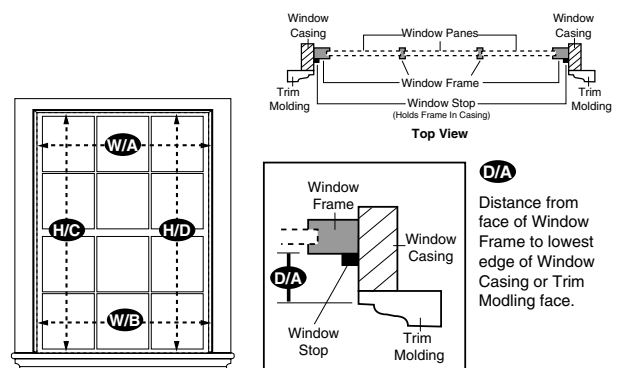

1. Measure the inside width of the window at both points (W/A and W/B), and the height at both points (H/C and H/D). Record.
2. Measure the window depth (D/A), the distance from the window frame to lowest edge of the window casing or molding.
3. It is important that various parts of the window construction (casing, molding, handles, etc.) allow enough space for louver extension in the fully open position when the shutter is closed and the louvers are fully open. Standard clearances are: 1-1/4" with 3-1/2" slats; 3/4" with 2-3/8" slats; and 1/2" with 1-7/8" slats.

Note: Remember to measure and remeasure to verify your numbers before selecting your shutters and the desired mounting procedure.